


GL GLR

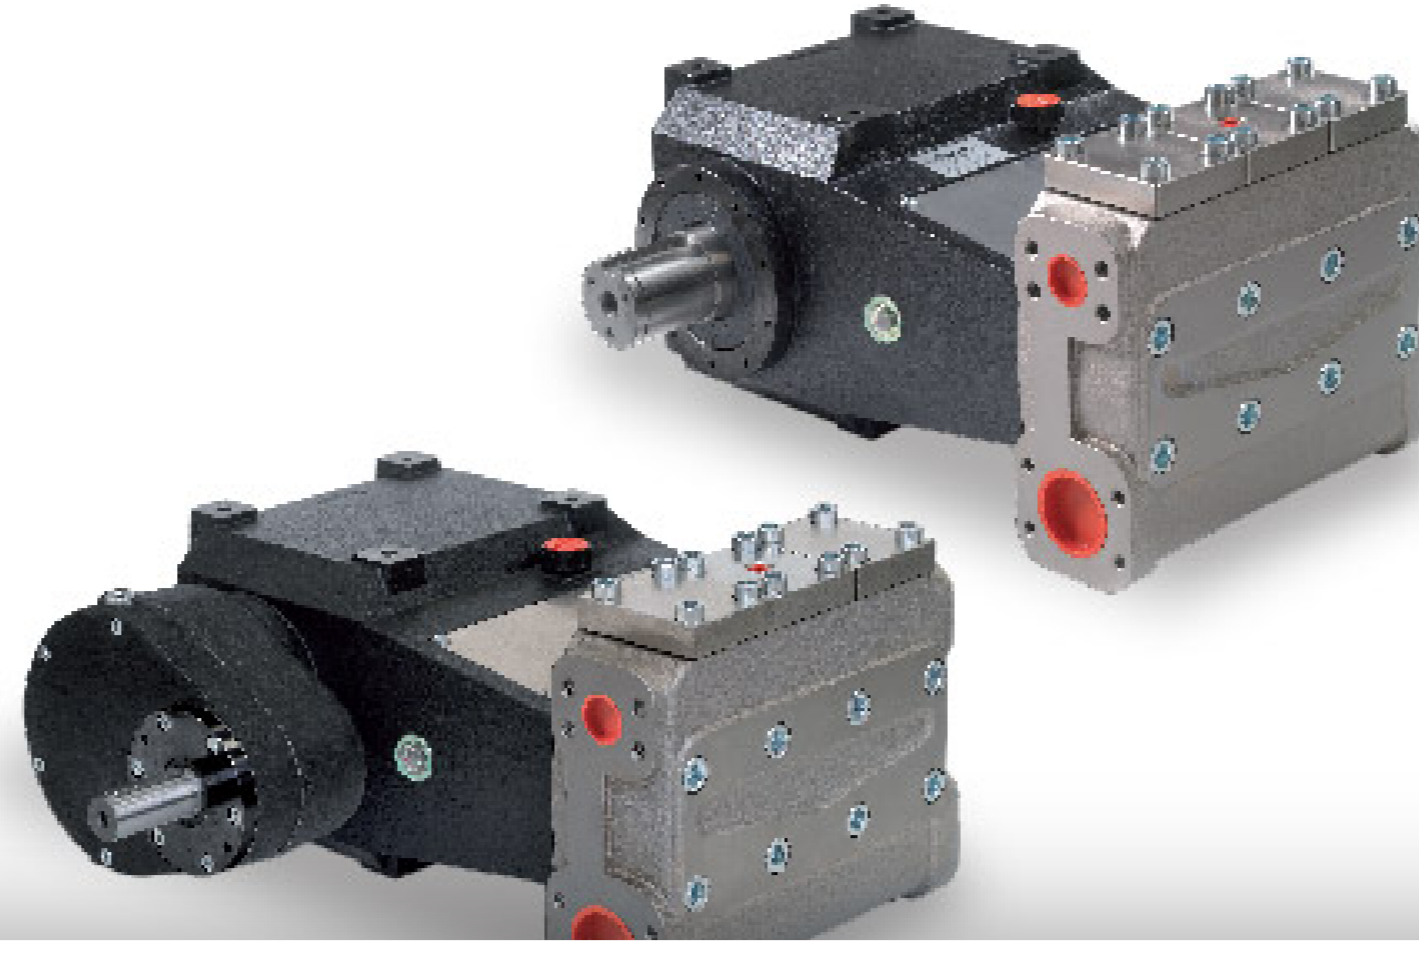

We inform that the cookies used in this website are "technical cookies" necessary in order to improve browsing, but also "analysis cookies" to make statistical analyses and "third party cookies". You can get more details and block the use of all or just some cookies, reading the extended privacy policy. If you continue browsing this site, it is implied that you express your consent to the use of the aforementioned cookies.

[I Agree](#) [Read More](#)

Pumps | Accessories | Applications and Uses | More Informations

GL GLR

- Pump body: spheroidal cast iron
- Head: spheroidal cast iron with chemical nickel plating
- Camshaft: steel
- Splash lubrication
- Shaft support bearings oversized for long duration
- Connecting rods: cast iron with thin-shell bearings
- Guiding piston: stainless steel
- Solid ceramic plungers
- Suction/delivery valves in stainless steel
- Seals: high dependability, V profile
- Versions in direct drive mount or with side gearbox available in 2 gear ratios and positionable on the right or left of the pump at 0° - 36° - 72° - 108° - 144° - 180° from the horizontal plane (see drawing)

Routine maintenance includes easy operations such as: oil check & change, check and possible replacement of seals.


Code	Model	Flow (l/min)	Flow (US gpm)	Head (m)	Head (ft)	Power (kW)	Power (HP)	Weight (kg)	Weight (lb)		
4911 0002	GL 109/290	750	109	28,8	200	4205	29	61,7	84	150	330,6
4911 0008	GLR 109/290	1500	109	28,8	200	4205	29	61,7	84	175	385,8
4911 0014	GLR 109/290	1800	109	28,8	200	4205	29	61,7	84	175	385,8
4911 0003	GL 135/235	750	135	35,7	235	3408	23,5	62,5	85	150	330,6
4911 0009	GLR 135/235	1500	135	35,7	235	3408	23,5	62,5	85	175	385,8
4911 0015	GLR 135/235	1800	135	35,7	235	3408	23,5	62,5	85	175	385,8
4911 0004	GL 171/185	750	171	45,2	185	2063	18,5	62,5	85	150	330,6
4911 0010	GLR 171/185	1500	171	45,2	185	2063	18,5	62,5	85	175	385,8
4911 0016	GLR 171/185	1800	171	45,2	185	2063	18,5	62,5	85	175	385,8
4911 0005	GL 212/150	750	212	56,1	150	2175	15	62,5	85	150	330,6
4911 0011	GLR 212/150	1500	212	56,1	150	2175	15	62,5	85	175	385,8
4911 0017	GLR 212/150	1800	212	56,1	150	2175	15	62,5	85	175	385,8
4911 0006	GL 256/125	750	256	67,6	125	1813	12,5	62,5	85	150	330,6
4911 0012	GLR 256/125	1500	256	67,6	125	1813	12,5	62,5	85	175	385,8
4911 0018	GLR 256/125	1800	256	67,6	125	1813	12,5	62,5	85	175	385,8

Max Inlet pressure: 3 bar – 43,5 p.s.i.

Oil Capacity: 7,98 l 80W 90

Oil Capacity with Gearbox: 8,98 l 80W 90

Connection Kit

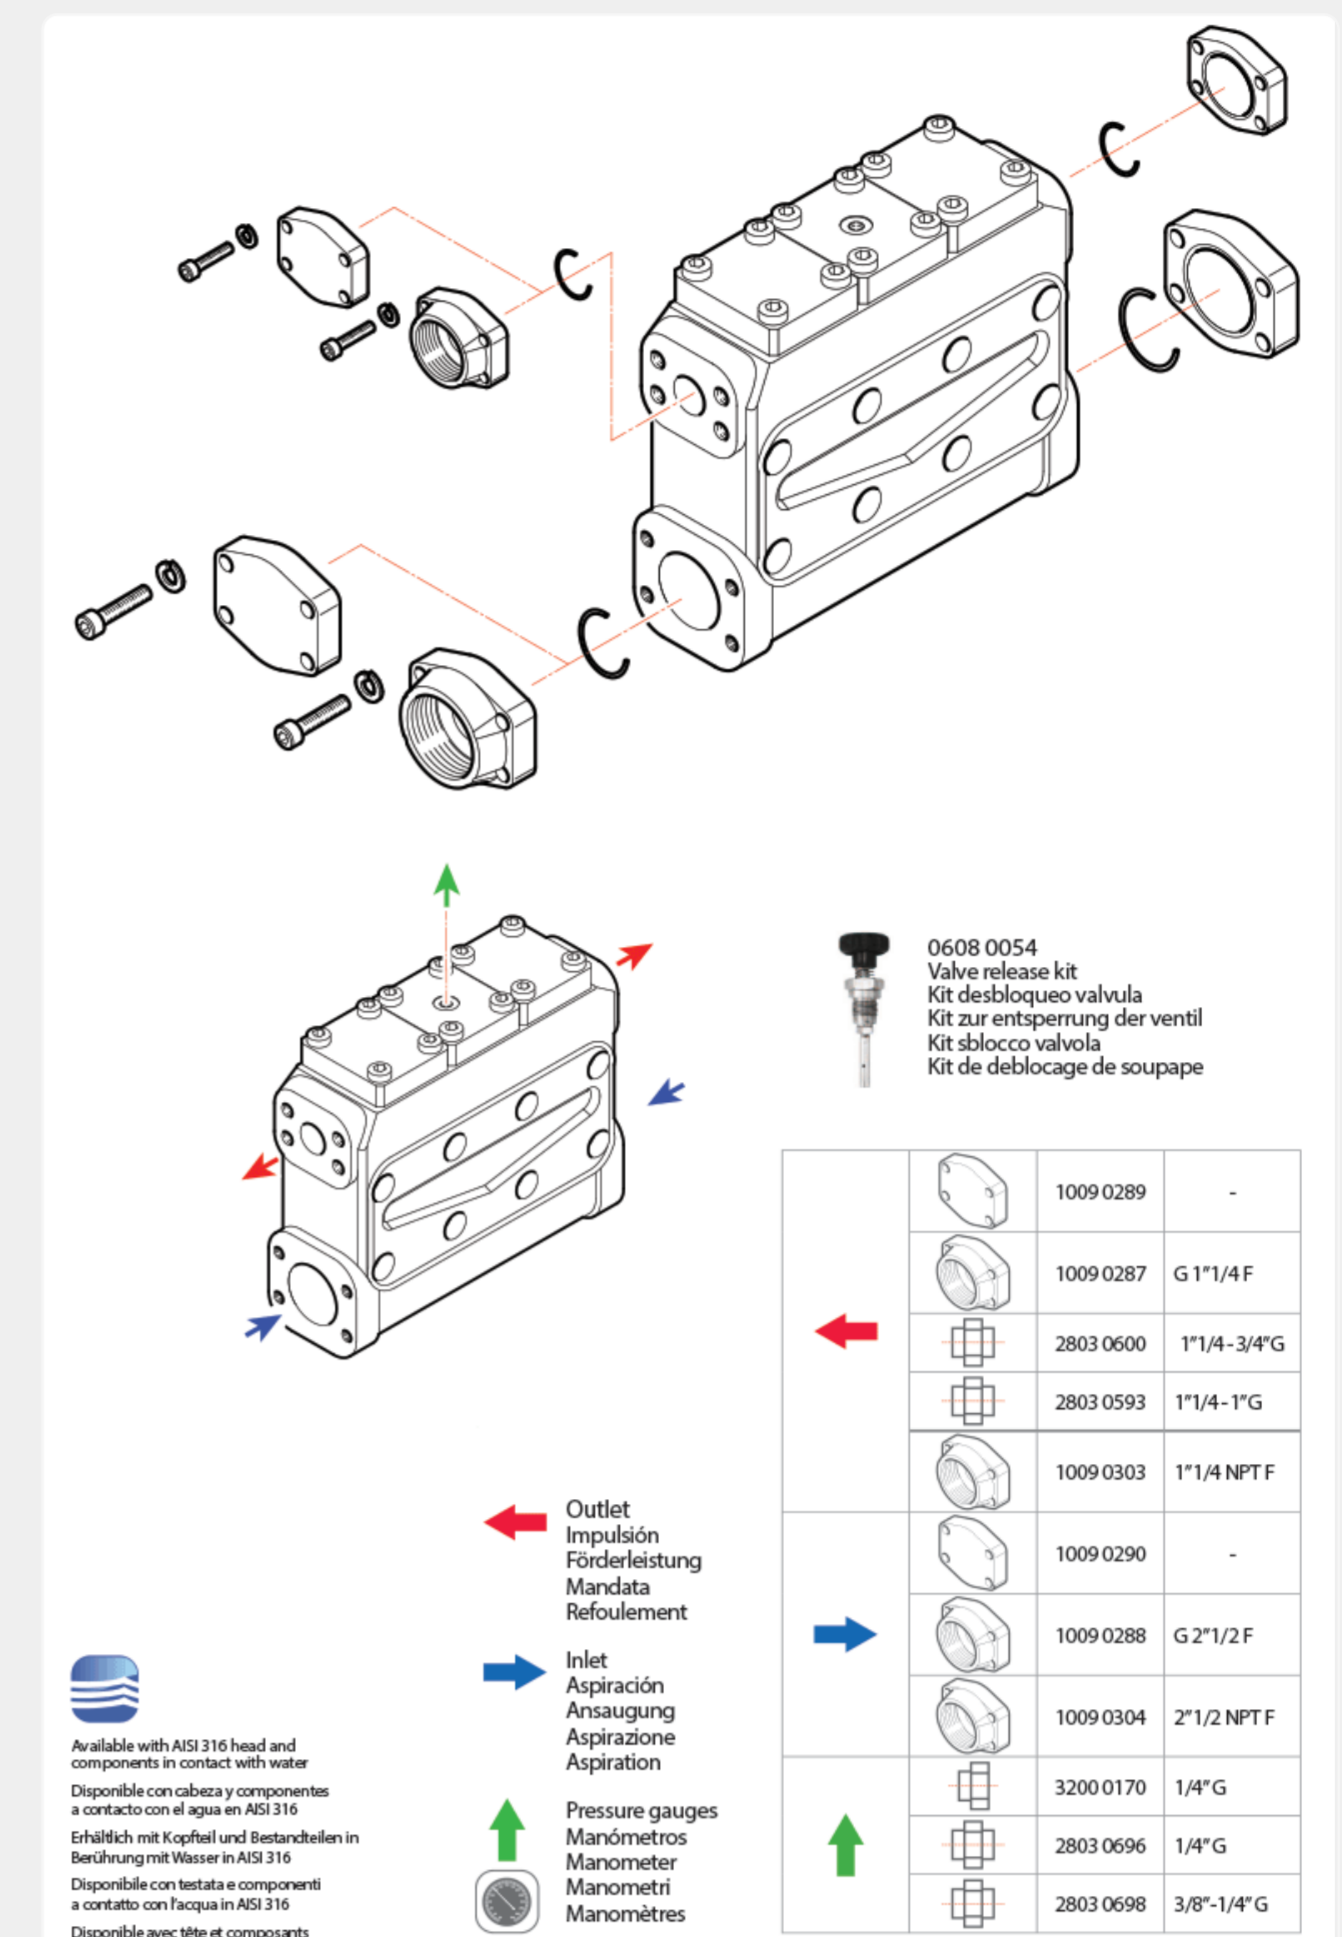

- [Download Data Sheet](#)
- [Download Spare Parts](#)
- [Download Manual](#)
- [Download General Part](#)

Accessories



Guns with Lances



Unloader Valves



Non Return Valves

Applications and Uses

GL – GLR



MUNICIPALITIES



MILITARY



CHEMICAL PROCESSING



PETROCHEMICAL

Contact us for more informations

Your Name (required)

Your Email (required)

Subject

Your Message

*In compliance with articles 7-8-9 of E.R. 2016/679 I declare that I have [read the information](#) and consent to the processing of data for the purposes as per point a)

- I authorize I do not authorize

Consent for "direct marketing" (this consent is optional). I declare that I have [read the information](#) and consent to the processing of data for the purposes as per point b) of this privacy policy and therefore consents to the receipt of advertising material/communications, such as brochures, invitations, newsletters, by post, e-mail, telephone, fax, sms and mms messages deriving from the Data Controller. It is herewith understood that the undersigned has the specific right to revoke this consent at any time, by contacting the Data Controller.

- I authorize I do not authorize

[SEND](#)

Share This Product. Choose Your Platform!

