


SL SLR

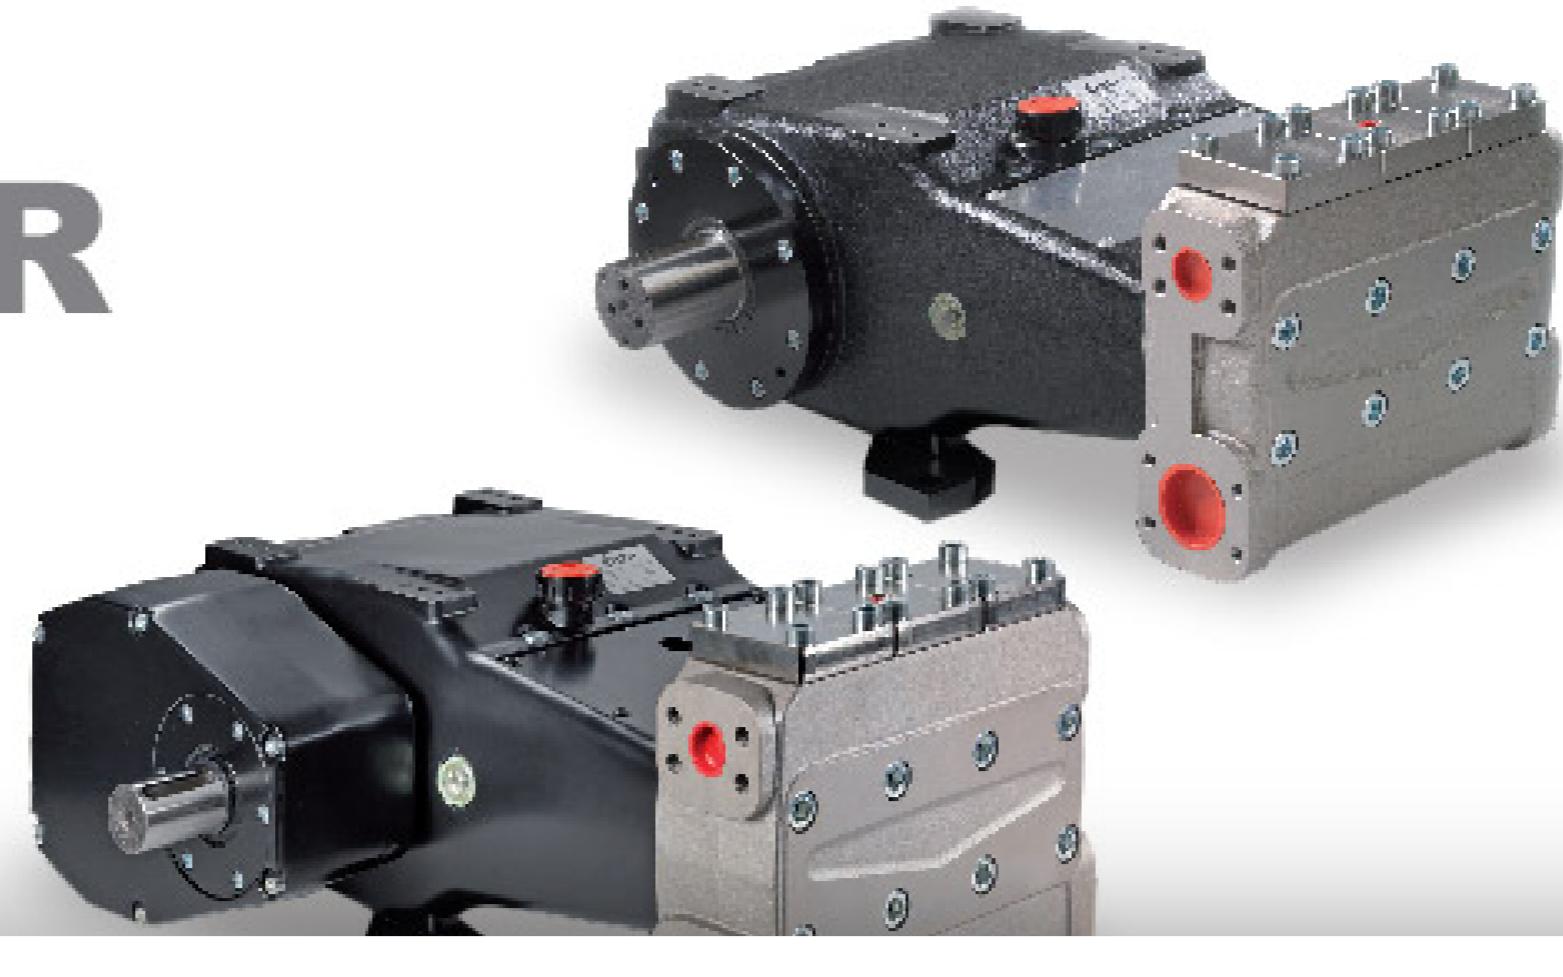

We inform that the cookies used in this website are "technical cookies" necessary in order to improve browsing, but also "analysis cookies" to make statistical analyses and "third party cookies". You can get more details and block the use of all or just some cookies, reading the extended privacy policy. If you continue browsing this site, it is implied that you express your consent to the use of the aforementioned cookies. [I Agree](#) [Read More](#)

Pumps | Accessories | Applications and Uses | More Informations

SL SLR

- Pump body: spheroidal cast iron
- Head: spheroidal cast iron with chemical nickel plating
- Camshaft: steel
- Splash lubrication
- Shaft support bearings oversized for long duration
- Connecting rods: cast iron with thin-shell bearings
- Guiding piston: stainless steel
- Solid ceramic plungers
- Suction/delivery valves in stainless steel
- Seals: high dependability, V profile
- Versions in direct drive mount or with side gearbox available in 3 gear ratios and positionable on the right or left of the pump at 0° - 45° - 90° - 135° - 180° from the horizontal plane (see drawing)

Routine maintenance includes easy operations such as: oil check & change, check and possible replacement of seals.

Models
Drawings
Chart
Installation Scheme

Code	Model	Unit	U1	U2	U3	U4	U5	U6	U7	U8	
099-001	SL 135/300	750	135	35,6	300	4550	30	81	110	235	518
099-006	SLR 135/300	1500	135	35,6	300	4550	30	81	110	270	595,2
099-011	SLR 135/300	1800	135	35,6	300	4550	30	81	110	270	595,2
099-003	SLR 165/220	2200	165	35,6	300	4550	30	81	110	270	595,2
099-002	SL 165/220	750	167	44,1	250	3625	25	81	110	235	518
099-007	SLR 165/220	1500	167	44,1	250	3625	25	81	110	270	595,2
099-012	SLR 165/220	1800	167	44,1	250	3625	25	81	110	270	595,2
099-016	SLR 165/220	2200	167	44,1	250	3625	25	81	110	270	595,2
099-005	SL 212/200	750	212	56	200	2900	20	81	110	235	518
099-008	SLR 212/200	1500	212	56	200	2900	20	81	110	270	595,2
099-013	SLR 212/200	1800	212	56	200	2900	20	81	110	270	595,2
099-015	SLR 212/200	2200	212	56	200	2900	20	81	110	270	595,2
099-004	SL 263/160	750	263	70	160	2320	16	81	110	235	518
099-009	SLR 263/160	1500	263	70	160	2320	16	81	110	270	595,2
099-014	SLR 263/160	1800	263	70	160	2320	16	81	110	270	595,2
099-018	SLR 263/160	2200	263	70	160	2320	16	81	110	270	595,2
099-002	SL 316/130	750	316	85,4	130	1885	13	81	110	235	518
099-010	SLR 316/130	1500	316	85,4	130	1885	13	81	110	270	595,2
099-011	SLR 316/130	1800	316	85,4	130	1885	13	81	110	270	595,2
099-019	SLR 316/130	2200	316	85,4	130	1885	13	81	110	270	595,2

PULSE system on request

COOLER system (option)

Max Inlet pressure: 3 bar – 43,5 p.s.i.

Oil Capacity: 8,98 l 80W 90

Oil Capacity with Gearbox 1500/1800 rpm 10,50 l – 2200 rpm 11,47 l 80W 90

Connection Kit

0608 0054
Valve release kit
Kit zur Entlastung der Ventile
Kit de déblocage de soupape

0608 0054
Valve release kit
Kit zur Entlastung der Ventile
Kit de déblocage de soupape

1009-028	-
1009-027	G 1/4" x 1/4"
2803-060	1/4" x 3/8"
2803-053	1/4" x 1/2"
1009-033	1/4" x 1/2"
1009-029	-
1009-028	G 2/1" x 1/2"
1009-034	2 1/2" x 1/2"
3200-070	1/4"
2803-060	1/4"
2803-068	3/8" x 1/4"

[Download Data Sheet](#)

[Download Spare Parts](#)

[Download Manual](#)

[Download General Part](#)

Accessories



Guns with Lances



Unloader Valves



Pulsation Dampeners

Applications and Uses

SL – SLR



MUNICIPALITIES



MILITARY



CHEMICAL PROCESSING



PETROCHEMICAL

Contact us for more informations

Your Name (required)

Your Email (required)

Subject

Your Message

*In compliance with articles 7-8-9 of E.R. 2016/679 I declare that I have read the information and consent to the processing of data for the purposes as per point a)

I authorize I do not authorize

Consent for "direct marketing" (this consent is optional). I declare that I have read the information and consent to the processing of data for the purposes as per point b) of this privacy policy and therefore consents to the receipt of advertising material/communications, such as brochures, invitations, newsletters, by post, e-mail, telephone, fax, sms and mms messages deriving from the Data Controller. It is herewith understood that the undersigned has the specific right to revoke this consent at any time, by contacting the Data Controller.

I authorize I do not authorize

[SEND](#)

Share This Product, Choose Your Platform!

